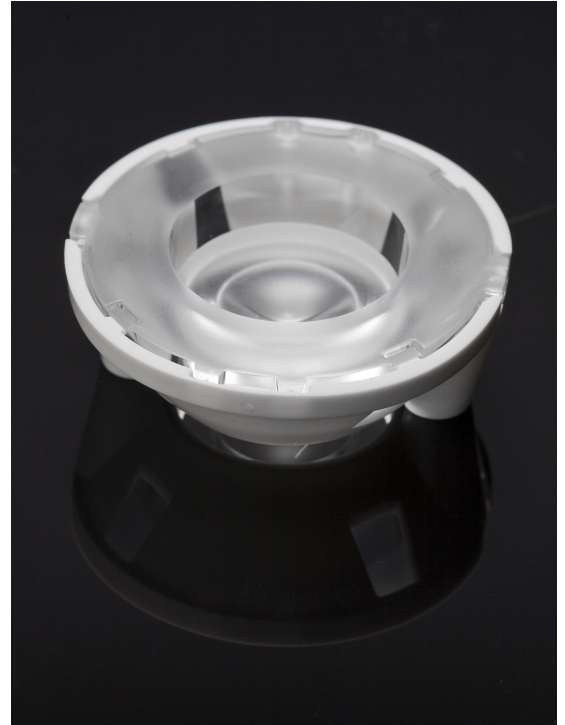


WINNIE-S

~20° spot beam. Holder with 35 mm screw hole distance according to Zhaga standard. Compatible with Bender+Wirth 4xx Typ L5 connector.


TECHNICAL SPECIFICATIONS:

Dimensions	Ø 49.8 mm
Height	19.3 mm
Fastening	screw
Colour	white
Box size	
Box weight	0 kg
Quantity in Box	364 pcs
ROHS compliant	yes ⓘ




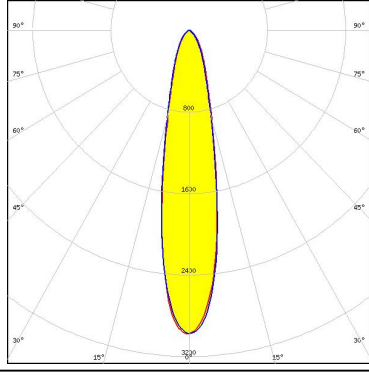

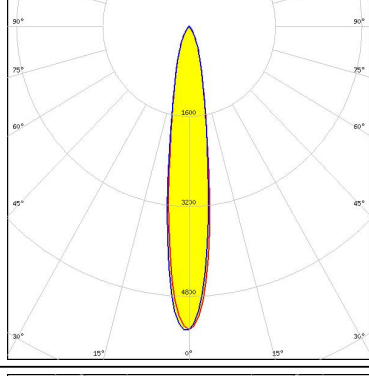
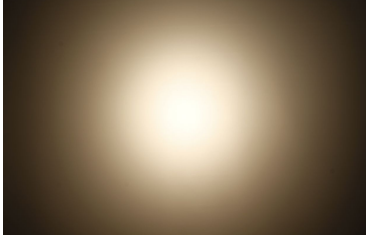
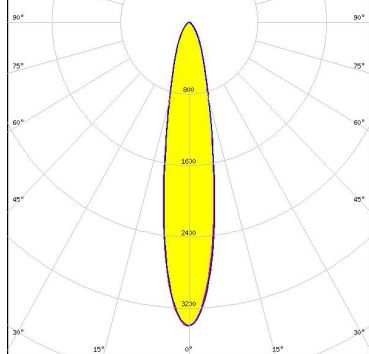


MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour
WINNIE-S	Single lens	PMMA	clear
WINNIE-HOLDER	Holder	PC	white

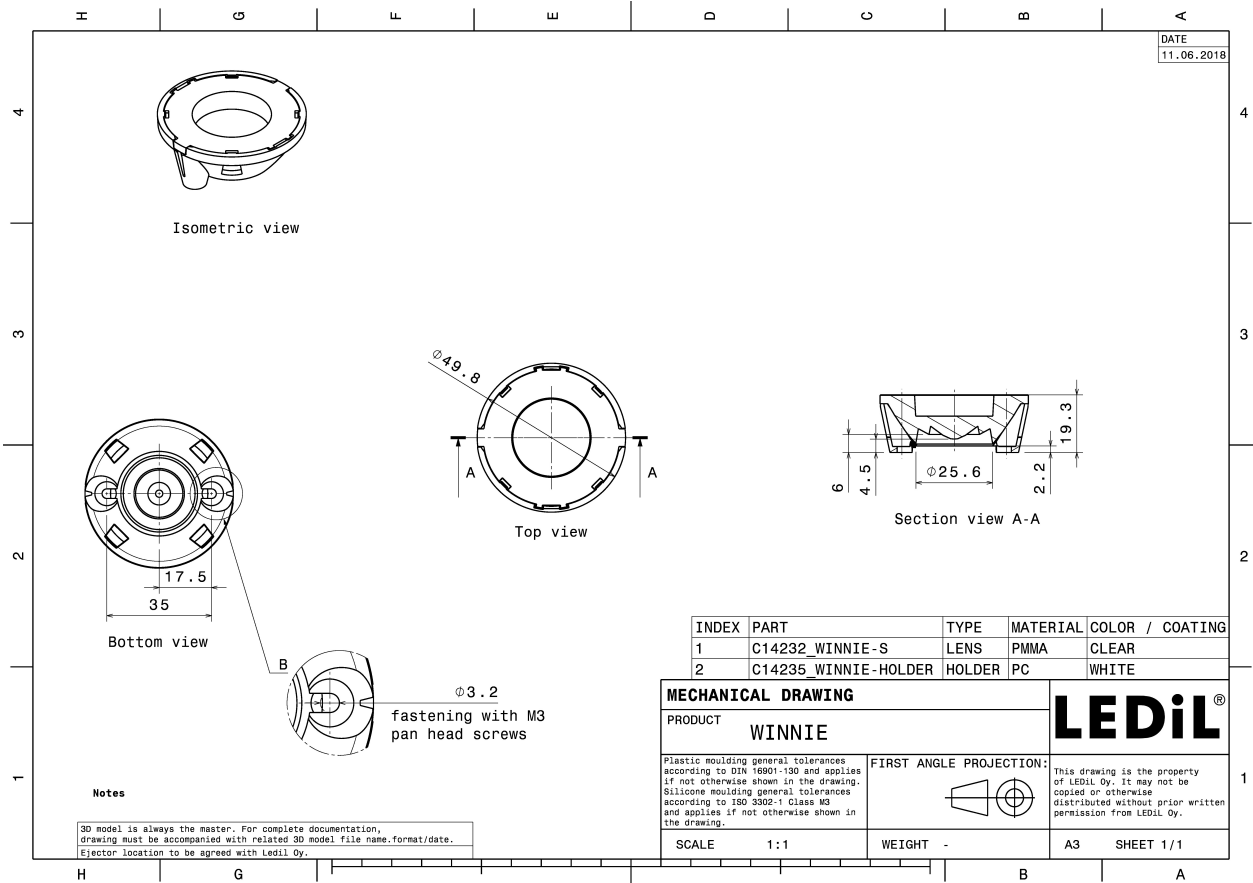



PHOTOMETRIC DATA (MEASURED):
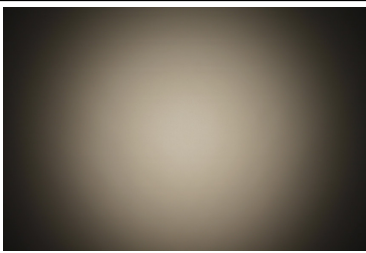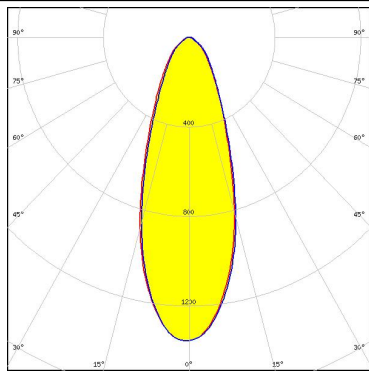
<p>bridgelux.</p> <p>LED V18 Gen6 FWHM 36.0° Efficiency 88 % Peak intensity 1.360 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>bridgelux.</p> <p>LED VERO10 FWHM 21.0° Efficiency 89 % Peak intensity 3.000 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>CITIZEN</p> <p>LED CLL01x FWHM 16.0° Efficiency 87 % Peak intensity 5.400 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>CITIZEN</p> <p>LED CLL02x/CLU02x (LES10) FWHM 20.0° Efficiency 88 % Peak intensity 3.400 cd/lm LEDs/each optic 1 Light colour White Required components: Bender Wirth: 434 Typ L5</p>		

PHOTOMETRIC DATA (MEASURED):



CITIZEN

LED CLL02x/CLU02x (LES10)
 FWHM 21.0°
 Efficiency 87 %
 Peak intensity 3.340 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

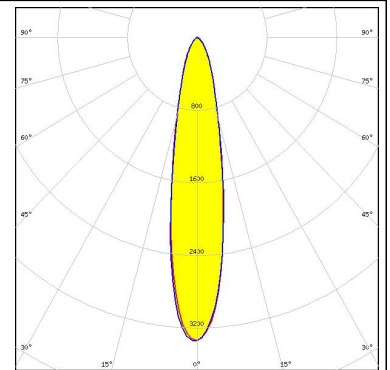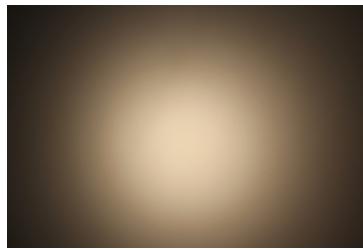



CITIZEN

LED CLL03x/CLU03x
 FWHM 28.0°
 Efficiency 87 %
 Peak intensity 2.100 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

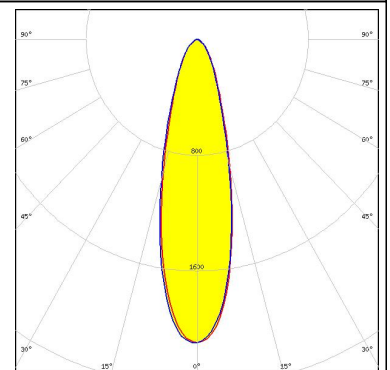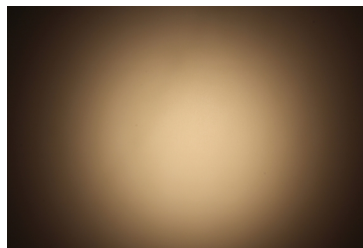



CITIZEN

LED CLL03x/CLU03x
 FWHM 30.0°
 Efficiency 88 %
 Peak intensity 1.900 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 Bender Wirth: 433 Typ L5

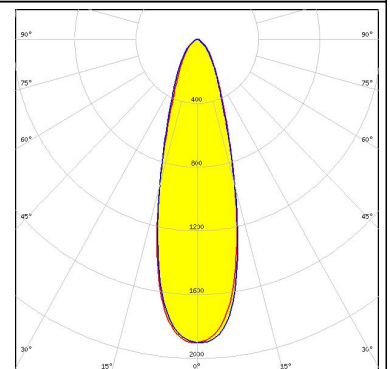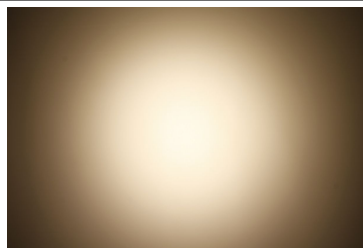

CITIZEN


LED CLU700/701
 FWHM 15.0°
 Efficiency 89 %
 Peak intensity 5.000 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

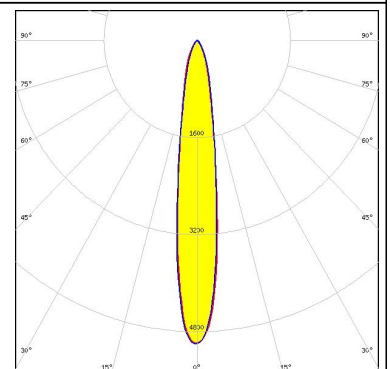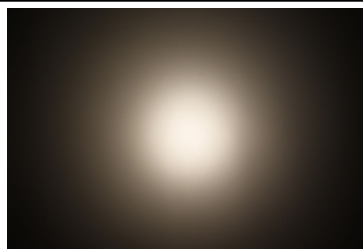

PHOTOMETRIC DATA (MEASURED):



CITIZEN

LED CLU700/701
FWHM 15.0°
Efficiency 90 %
Peak intensity 5.700 cd/m
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 434 Typ L5

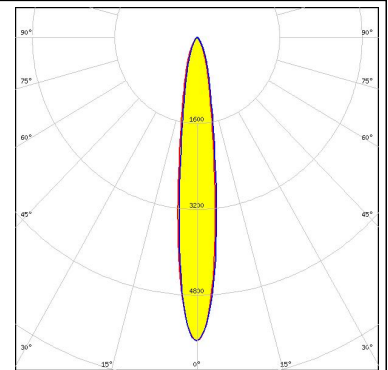



CITIZEN

LED CLU710/711
FWHM 18.0°
Efficiency 90 %
Peak intensity 3.700 cd/m
LEDs/each optic 1
Light colour White
Required components:

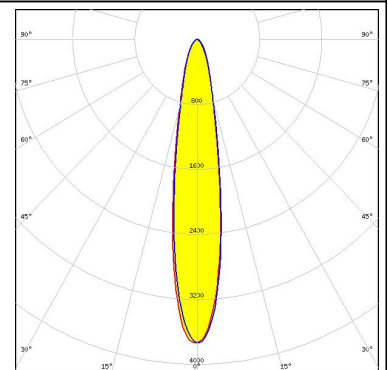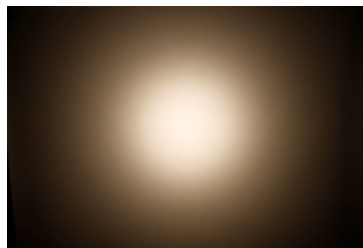



CITIZEN

LED CLU710/711
FWHM 18.0°
Efficiency 88 %
Peak intensity 3.900 cd/m
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 470 Typ L5

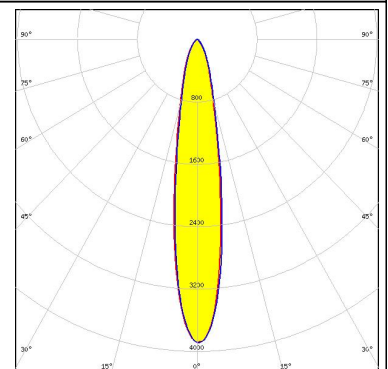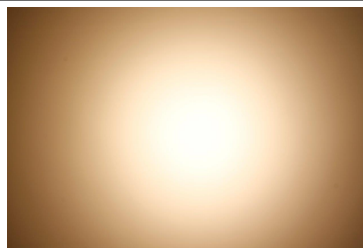

CITIZEN



LED CLU710/711
FWHM 18.0°
Efficiency 90 %
Peak intensity 3.700 cd/m
LEDs/each optic 1
Light colour White
Required components:

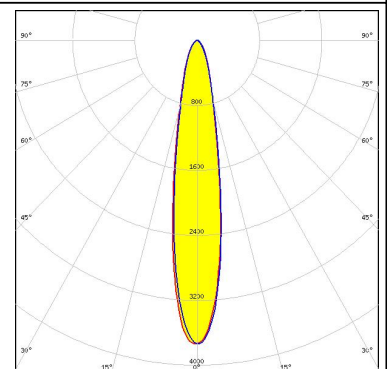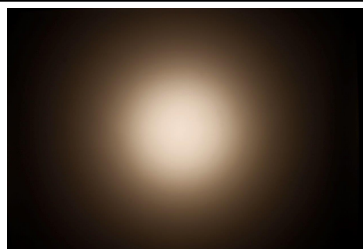

PHOTOMETRIC DATA (MEASURED):



CITIZEN

LED CLU720/721
 FWHM 22.0°
 Efficiency 93 %
 Peak intensity 3.100 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 Bender Wirth: 433 Typ L5

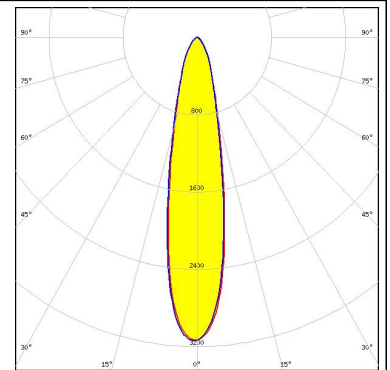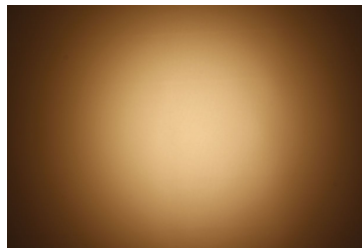



CREE

LED CXA/B 13xx
 FWHM 18.0°
 Efficiency 89 %
 Peak intensity 4.690 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

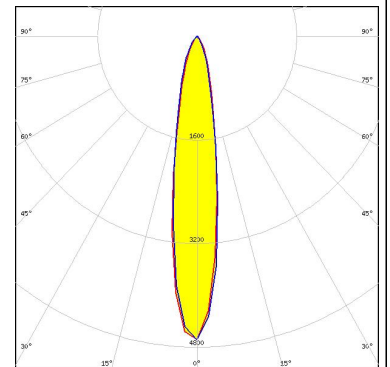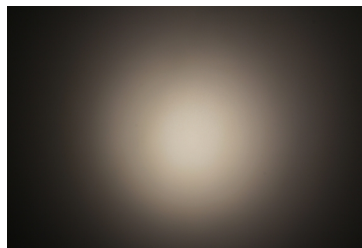



CREE

LED CXA/B 15xx
 FWHM 20.0°
 Efficiency 87 %
 Peak intensity 3.680 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

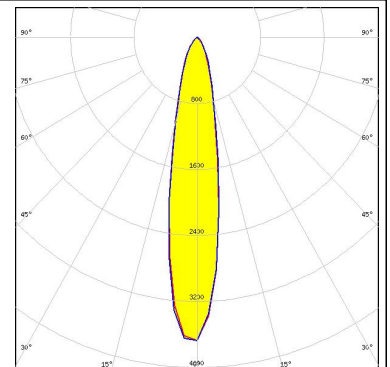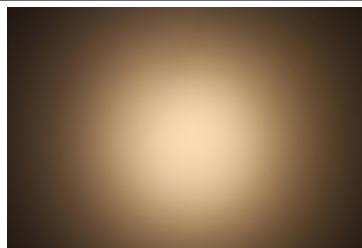

CREE



LED CXA/B 1816 & CXA/B 1820 & CXA 1850
 FWHM 25.0°
 Efficiency 86 %
 Peak intensity 2.420 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

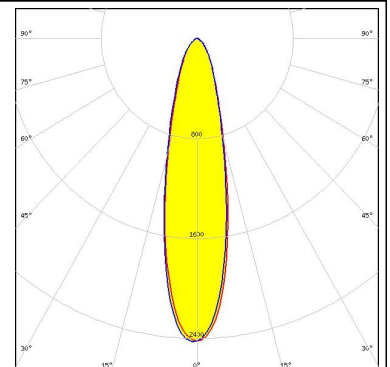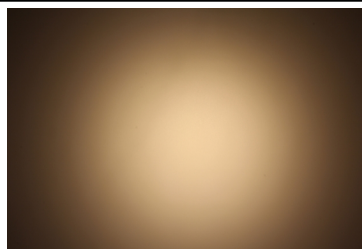


PHOTOMETRIC DATA (MEASURED):




LED CXA/B 25xx
 FWHM 35.0°
 Efficiency 85 %
 Peak intensity 1.400 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

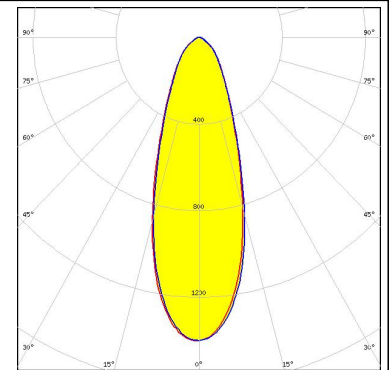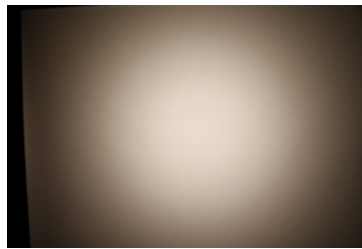



LED LUXEON CoB 1202/1203
 FWHM 20.0°
 Efficiency 87 %
 Peak intensity 3.730 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

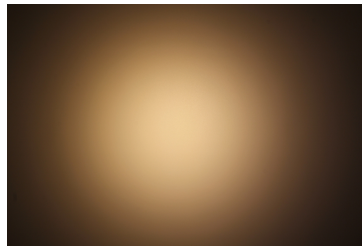

LED LUXEON CoB 1202s
 FWHM 15.0°
 Efficiency 89 %
 Peak intensity 5.760 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

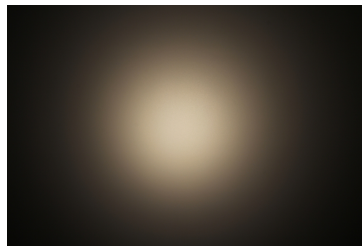



LED CxM-14 (19x19)
 FWHM 29.0°
 Efficiency 86 %
 Peak intensity 2.000 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

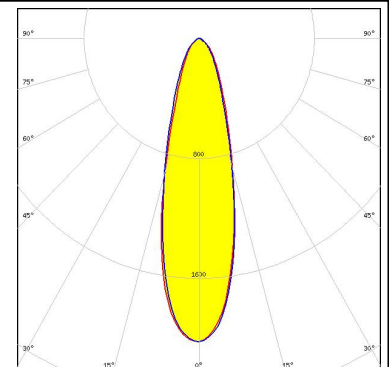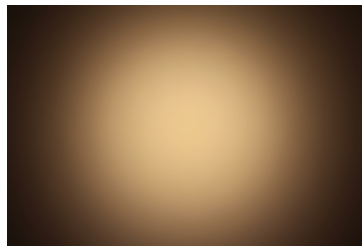


PHOTOMETRIC DATA (MEASURED):





LED CxM-9 (13.5x13.5)
 FWHM 22.0°
 Efficiency 87 %
 Peak intensity 3.300 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

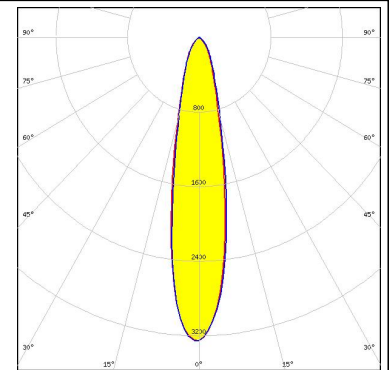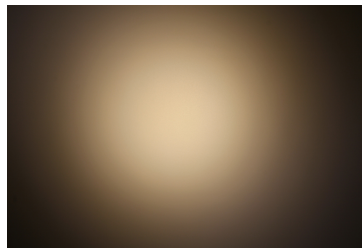



LED Duris S10
 FWHM 18.0°
 Efficiency 88 %
 Peak intensity 4.000 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

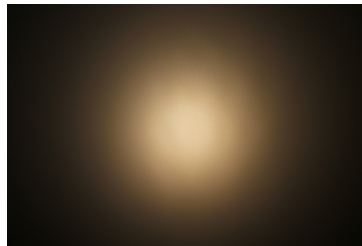

LED Soleriq S13
 FWHM 26.0°
 Efficiency 88 %
 Peak intensity 2.300 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

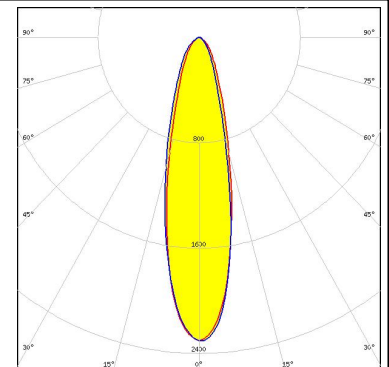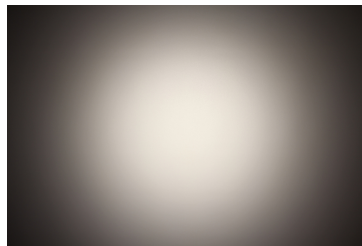



LED Soleriq S19
 FWHM 33.0°
 Efficiency 88 %
 Peak intensity 1.600 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

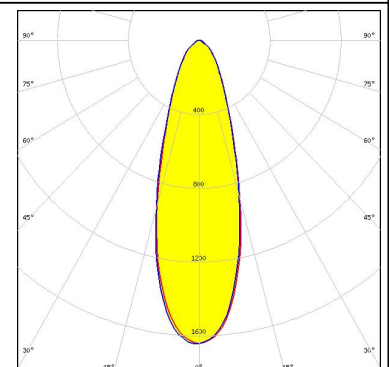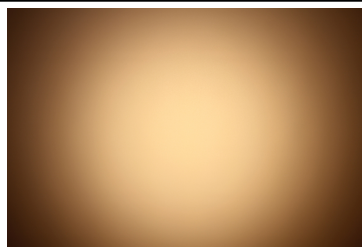

PHOTOMETRIC DATA (MEASURED):



SAMSUNG

LED COB D Series LES 14.5 mm
 FWHM 30.0°
 Efficiency 86 %
 Peak intensity 1.750 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

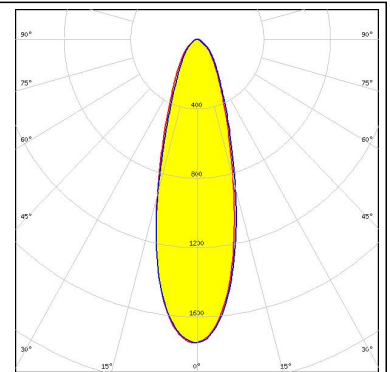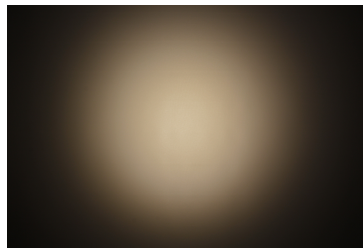



SAMSUNG

LED COB D Series LES 9.8 mm
 FWHM 20.0°
 Efficiency 87 %
 Peak intensity 3.300 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

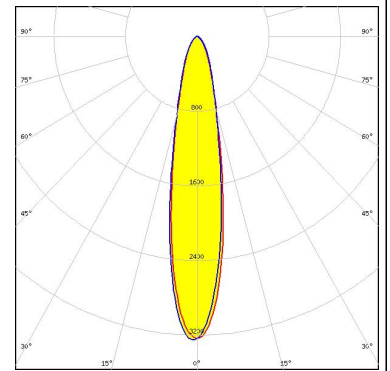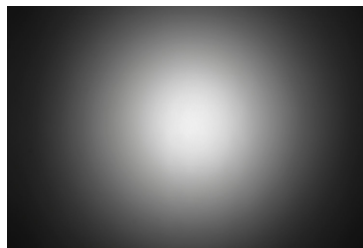



SEOUL SEMICONDUCTOR

LED MJT COB LES 14.5
 FWHM 33.0°
 Efficiency 86 %
 Peak intensity 1.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 Bender Wirth: 433 Typ L5

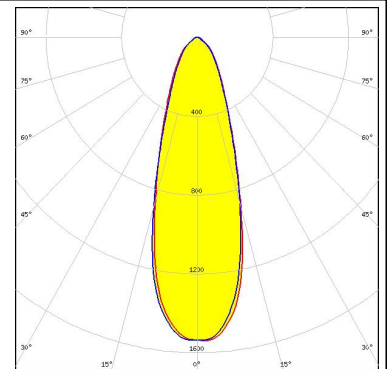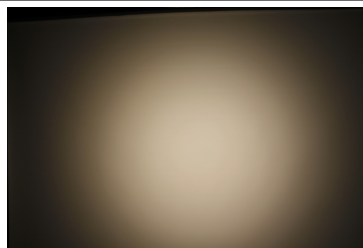
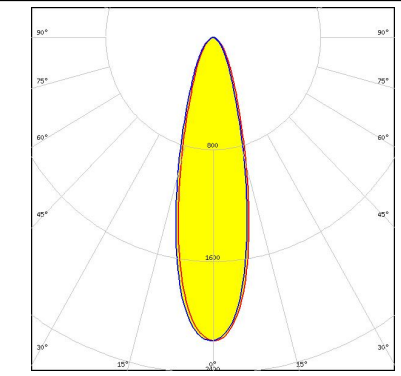
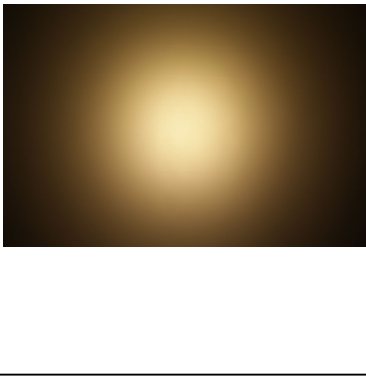
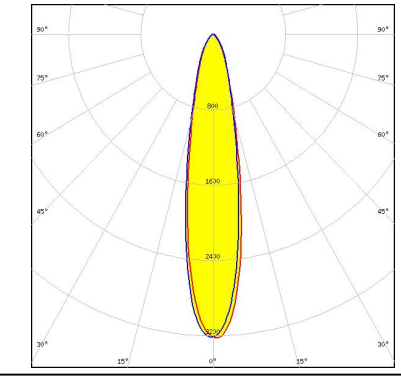

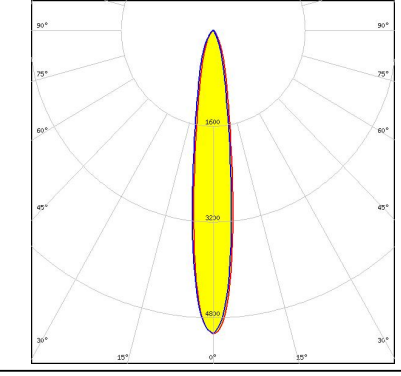
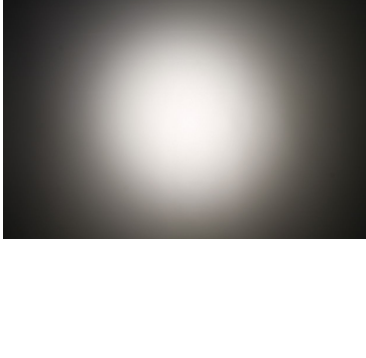
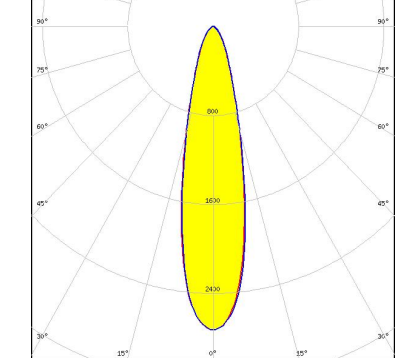


SEOUL SEMICONDUCTOR

LED MJT COB LES 9.8
 FWHM 21.0°
 Efficiency 89 %
 Peak intensity 3.100 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 Bender Wirth: 434 Typ L5

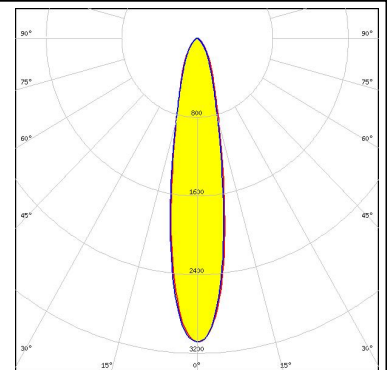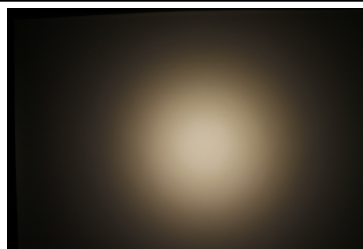



PHOTOMETRIC DATA (MEASURED):

<p>SEMI SEOUL SEMICONDUCTOR</p> <p>LED ZC12/18 FWHM 27.0° Efficiency 88 % Peak intensity 2.200 cd/lm LEDs/each optic 1 Light colour White Required components: Bender Wirth: 433 Typ L5</p>		
<p>TRIDONIC</p> <p>LED SLE G5 LES11 FWHM 21.0° Efficiency 87 % Peak intensity 3.200 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>TRIDONIC</p> <p>LED SLE G5 LES6 FWHM 15.0° Efficiency 87 % Peak intensity 5.100 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>VS LIGHTING SOLUTIONS</p> <p>LED DMC 124 / 125 FWHM 24.0° Efficiency 89 % Peak intensity 2.700 cd/lm LEDs/each optic 1 Light colour White Required components: Bender Wirth: 433 Typ L5</p>		

PHOTOMETRIC DATA (MEASURED):




LED DMC 128
FWHM 30.0°
Efficiency 88 %
Peak intensity 2.000 cd/m
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 433 Typ L5

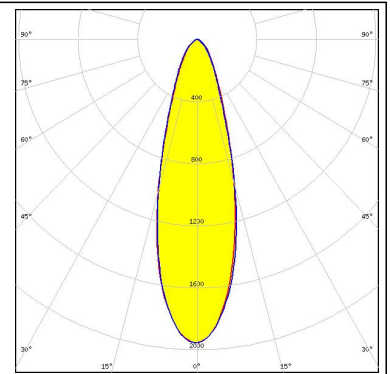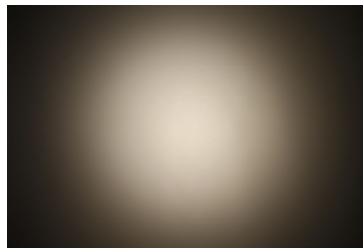


PHOTOMETRIC DATA (SIMULATED):



LED CXA/B 13xx
FWHM 12.0°
Efficiency 88 %
Peak intensity 10.100 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 448 Typ L5

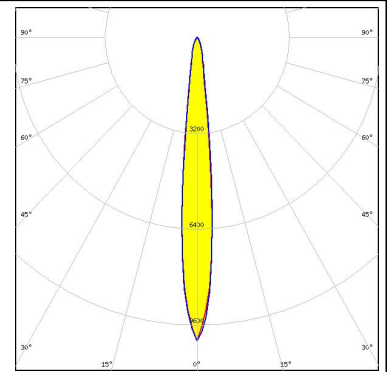

LED LUXEON CoB 1202/1203
FWHM 18.0°
Efficiency 88 %
Peak intensity 4.183 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 441 Typ L5

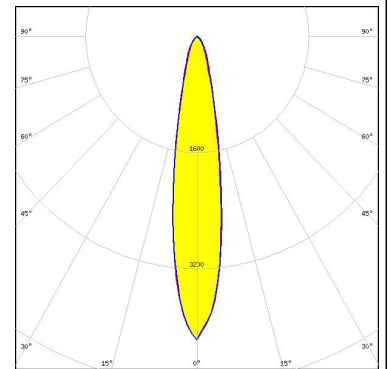

LED LUXEON CoB Compact
FWHM 15.0°
Efficiency 89 %
Peak intensity 5.760 cd/lm
LEDs/each optic 1
Light colour White
Required components:



LED CxM-14 (19x19)
FWHM 30.0°
Efficiency 88 %
Peak intensity 1.900 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 433 Typ L5


PHOTOMETRIC DATA (SIMULATED):




LED CxM-9 (13.5x13.5)
 FWHM 20.0°
 Efficiency 88 %
 Peak intensity 3.400 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 Bender Wirth: 434 Typ L5




LED Soleriq S9
 FWHM 22.0°
 Efficiency 89 %
 Peak intensity 3.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

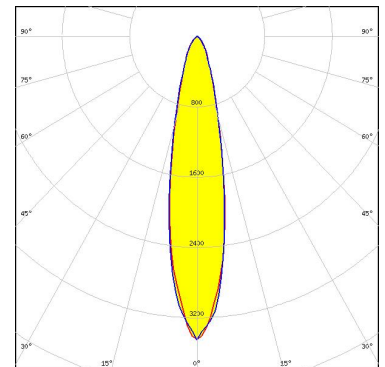

LED COB D Series LES 14.5 mm
 FWHM 29.0°
 Efficiency 91 %
 Peak intensity 2.200 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

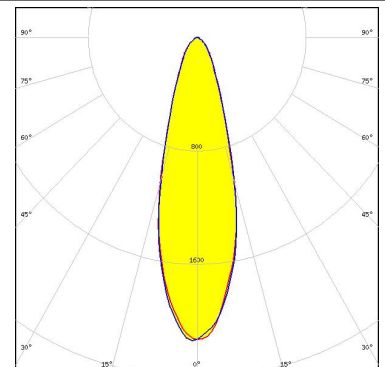


LED LC010C
 FWHM 12.0°
 Efficiency 88 %
 Peak intensity 10.100 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 Bender Wirth: 479 Typ L5

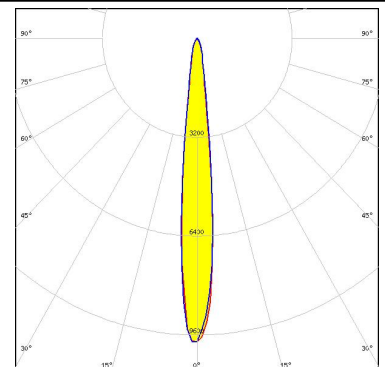

PHOTOMETRIC DATA (SIMULATED):


SAMSUNG

LED LC020C
 FWHM 20.0°
 Efficiency 89 %
 Peak intensity 4.000 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 Bender Wirth: 479 Typ L5

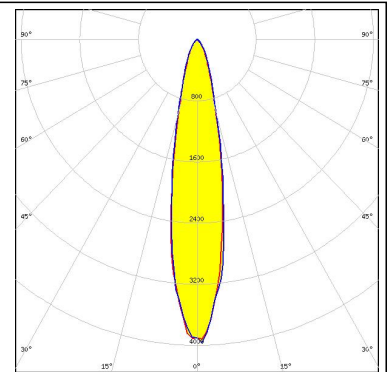

SAMSUNG

LED LC040C
 FWHM 26.0°
 Efficiency 87 %
 Peak intensity 2.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 Bender Wirth: 479 Typ L5

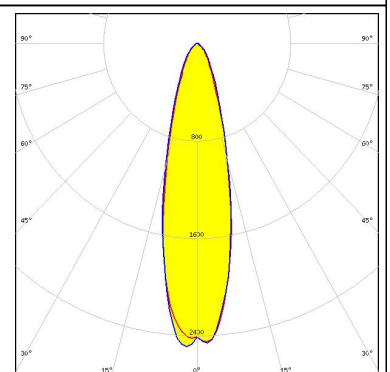


SEOUL SEMICONDUCTOR

LED ZC4/6
 FWHM 20.0°
 Efficiency 88 %
 Peak intensity 3.400 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 Bender Wirth: 434 Typ L5

TRIDONIC


LED SLE G6 LES10
 FWHM 19.0°
 Efficiency 94 %
 Peak intensity 4.610 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 Bender Wirth: 434 Typ L5

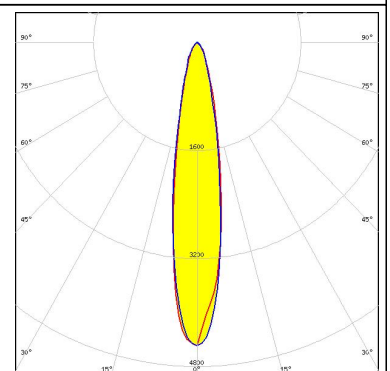

PHOTOMETRIC DATA (SIMULATED):


TRIDONIC

LED SLE G6 LES15
FWHM 26.0°
Efficiency 91 %
Peak intensity 2.500 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 433 Typ L5

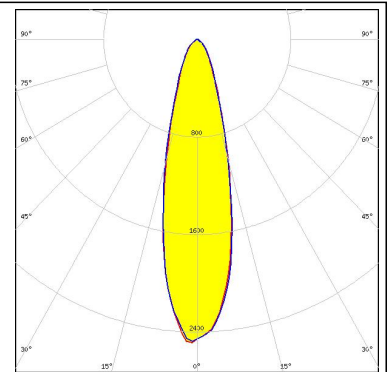

TRIDONIC

LED SLE G6 LES17
FWHM 29.0°
Efficiency 92 %
Peak intensity 2.140 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 433 Typ L5

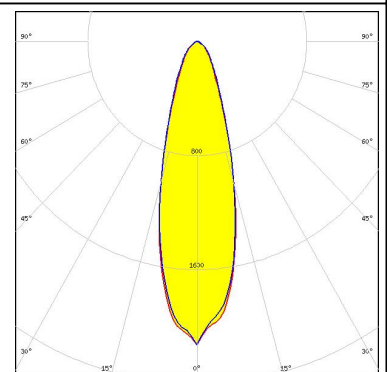

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)